
GDW560V/FS3A



Power Rating		
Emergency Standby Power ESP	kVA	560.5
Emergency Standby Power ESP	kW	448.4
Prime power PRP	kVA	509.5
Prime power PRP	kW	407.6
Voltage	V	400/230
Frequency	Hz	50
Power factor	cos ϕ	0.8
Phases		3
Fuel		Diesel



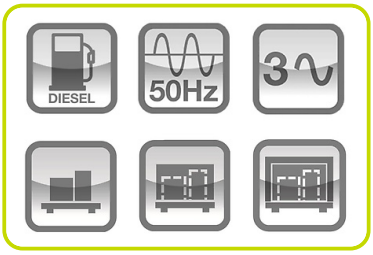

Ratings definition (ISO-8528)
ESP - Emergency Standby Power:
It is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.
PRP - Prime Power:
It is defined as being the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output over 24 h of operation shall not exceed 70 % of the prime power.
G2 class load acceptance in accordance with ISO 8528-5:2013 Higher performance classes check upon request.
Gensets are compliant with EC mark which includes the following directives:
• 2006/42/CE Machinery safety.
• 2014/30/UE Electromagnetic compatibility.
• 2014/35/UE electrical equipment designed for use within certain voltage limits
• 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC) – If applicable
• 97/68/EC Emissions of gaseous and particulate pollutants. (amended by 2016/1628 EC) – If applicable
• EN 12100, EN 13857, EN 60204
Company with quality certification ISO 9001


www.pramac.com

Data Centre Power (available with DCP optional)



Power Rating DCP

Data Center Power DCP	kVA	509.5
Data Center Power DCP	kW	407.6
Voltage	V	400/230
Frequency	Hz	50
Power factor	cos ϕ	0.8
Phase		3
Fuel		Diesel

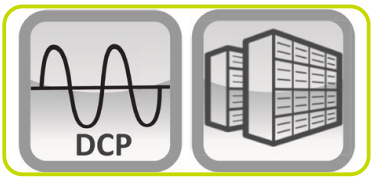

www.pramac.com

www.pramac.com

Engine specifications		
Engine brand		Volvo
Model		TAD1651GE
Operation Speed Nominal	rpm	1500
Engine cooling system		Water
Exhaust emission level		Stage IIIA
Nr. of cylinder and disposition		6 in line
Displacement	cm^3	16120
Aspiration	Type	Turbocharged
Speed governor		Electronic
Gross Engine Power ESP	kWm	484
Gross Engine Power PRP	kWm	441
Gross Data Center Power DCP	kWm	441
Fan Power	kWm	11
Fan Air flow	m^3/min	516
Total Oil capacity	l	34
Lube oil consumption PRP (max)	% fuel consumption	0.1
Total Coolant capacity	l	60
Fuel		Diesel
Specific Fuel consumption 75% PRP	g/kWh	205
Starting system		Electric
Electric circuit	V	24



Alternator specifications		
Alternator brand		Mecc Alte
Model		ECO40 1L4 C
Winding		Standard
Winding Connections	Type	Parallel Star
Frequency	Hz	50
Voltage	V	400
Phases		3
Power factor	cos ϕ	0.8
Stand-by rating 27°C	kVA	601
Continuous Nominal Rating 40°C	kVA	550
Efficiency @ 100% of load	%	94.8
Type		Brushless
Poles		4
Voltage tolerance	%	0.5
Class		H
IP protection		23



Installation data		
Total air flow	m^3/min	600
Exhaust gas flow PRP	m^3/min	76
Exhaust gas temperature	°C	523
Fuel consumption 75% PRP	l/h	81.22
Fuel consumption 100% PRP	l/h	103.94



Fuel Tank - Options Available:		
To be ordered with equipment (when necessary)		
AUTONOMY		
8PFT Running time 75% PRP	h	8.00
MFT-XS Running time 75% PRP	h	6.16
MFT-S Running time 75% PRP	h	8.00
MFT-XM Running time 75% PRP	h	12.31
MFT-M Running time 75% PRP	h	28.32
MFT-L Running time 75% PRP	h	55.41



PFT	Plastic Fuel Tank	Type	8
	8PFT Fuel tank capacity	l	650
	8PFT Fuel tank location		Internal
	.		
MFT	Metal Fuel Tank	Type	XS
	MFT-XS Fuel tank capacity	l	500
	MFT-XS Fuel tank location		Internal
	.		
MFT	Metal Fuel Tank	Type	S
	MFT-S Fuel tank capacity	l	650
	MFT-S Fuel tank location		Internal
	.		
MFT	Metal Fuel Tank	Type	XM
	MFT-XM Fuel tank capacity	l	1000
	MFT-XM Fuel tank location		With sub-base
	MFT-XM EXTRA Length (only for open versions)	mm	774
	MFT-XM EXTRA Height	mm	427
	MFT-XM EXTRA Weight	kg	666
	.		
MFT	Metal Fuel Tank	Type	M
	MFT-M Fuel tank capacity	l	2300
	MFT-M Fuel tank location		With sub-base
	MFT-M EXTRA Length (only for open versions)	mm	774
	MFT-M EXTRA Height	mm	415
	MFT-M EXTRA Weight	kg	900
	.		
MFT	Metal Fuel Tank	Type	L
	MFT-L Fuel tank capacity	l	4500
	MFT-L Fuel tank location		With sub-base
	MFT-L EXTRA Length (only for open versions)	mm	774
	MFT-L EXTRA Height	mm	780
	MFT-L EXTRA Weight	kg	1320





Electrical Data		
Battery Voltage	V	24
Genset Voltage	V	400/230
Frequency	Hz	50
Phases		3
Power Factor	cos ϕ	0.8
Max current	A	809
Nominal current	A	735
Circuit breaker	A	800



www.pramac.com

Control panel - Options Available:

AUTOMATIC CONTROL PANEL	ACP
MODULAR PARALLEL PANEL	MPP



ACP - AUTOMATIC CONTROL PANEL

- Auto Mains Failure (AMF) function
- Gen-set controller for single genset operating in standby or prime power modes
- Full gen-set monitoring and protection
- Detailed event and performance log with time and date
- Wide range of remote control modules available as option
- Wide range of I/O expansion modules available as option

Power supply by circuit breaker and/or terminal bus bar



MPP - MODULAR PARALLEL PANEL

- Modular parallel panel allows the genset to work in parallel (up to 32 gen-sets)
- Easy switching between parallel to mains or multiple genset applications
- Full gen-set monitoring and protection
- Detailed event and performance log with time and date
- Wide range of communication and connection capabilities available

Power supply by circuit breaker and/or terminal bus bar



CONTROL PANEL - Optional Equipment:

Differential Protection	ADI



www.pramac.com


OPEN VERSION

- Baseframe made of welded steel profile
- Anti-vibration mountings properly sized
- Screwed support legs
- Hole for handling by crane
- Moving and rotating parts protection against accidental contact
- Grounding point to connect all metal parts to ground



Dimensional data Open Version

Length	(L) mm	3555
Width	(W) mm	1500
Height	(H) mm	2125

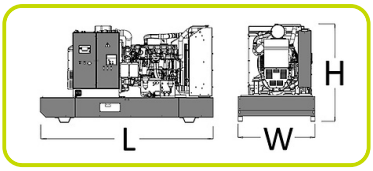

Weight	kg	3786

OPTIONS AVAILABLE (ONLY FOR OPEN VERSION)

Industrial Exhaust System	IES
Residential Exhaust System	RES
Critical Exhaust System	CES




CANOPY VERSION

- Weatherproof Enclosure made of galvanized sheet metal allows to protect genset from corrosion and aggressive condition
- Soundproofed enclosure tanks to high quality soundproof material and residential silencer, allows to have low noise emission level
- Big large lateral doors allows an easy service and maintenance operation
- Doors equipped with key lockable handles
- Baseframe made of welded steel profile
- Anti-vibration mountings properly sized
- Screwed support legs
- Hole for handling by crane
- Moving and rotating parts protection against accidental contact
- Grounding point to connect all metal parts to ground



Dimensional data Canopy Version

Length	(L) mm	4500
Width	(W) mm	1590
Height	(H) mm	2347

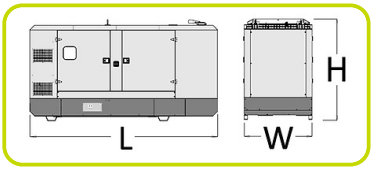

Weight	kg	5015

Noise Level Canopy Version

Guaranteed noise level (LWA)	dB(A)	105
Noise pressure level @ 1 m	dB(A)	85
Noise pressure level @ 7 m	dB(A)	75



www.pramac.com


CANOPY EXTRA SILENT VERSION

- Extra silent Enclosure with low noise emission, suitable for installation near city centre and in any place where severe noise emission restriction are present
- Extra Silent Enclosure guarantee very low noise emission thanks to an additional soundproofing modules, high quality soundproof material and residential silencer installed inside the enclosure
- Weatherproof Enclosure made of galvanized sheet metal allows to protect genset from corrosion and aggressive condition
- Big large lateral doors allows an easy service and maintenance operation
- Doors equipped with key lockable handles
- Baseframe made of welded steel profile
- Anti-vibration mountings properly sized
- Screwed support legs
- Hole in the baseframe for handling by crane
- Moving and rotating parts protection against accidental contact
- Grounding point to connect all metal parts to ground



Dimensional data Canopy (Extra Silent Enclosure)

Length	(L) mm	6100
Width	(W) mm	1590
Height	(H) mm	2347

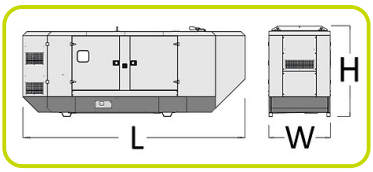

Weight	kg	5432

Noise Level Canopy (Extra Silent Enclosure)

Guaranteed noise level (LWA)	dB(A)	102
Noise pressure level @ 1 m	dB(A)	82
Noise pressure level @ 7 m	dB(A)	72




OPTIONS AVAILABLE (ONLY FOR CANOPY VERSIONS)

Roof lifting Point	RLP



OPTIONAL FEATURES

To be ordered with equipment (when necessary)	:
Pre-Heating System	PHS
Heavy-Duty Air Filter	HDF
Water Separator Filter	WSP
Exhaust Spark Arrestor	ESA
Hot Parts Protection	HPP
Alternator Winding Total Protection	WTP
Alternator anti-condensation heater	ACH
Galvanized skid base with fork lift point	GSB

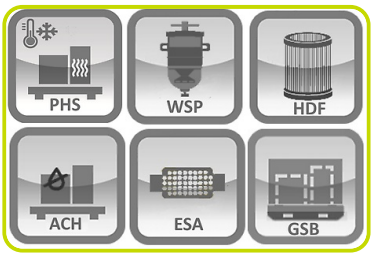

The information is aligned with the Data file at the time of download.
Printed on 19/05/2025 (ID 13825)

©2025 | PR Industrial S.r.L unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

www.pramac.com