GS/P AGILE EVO S4 1185x555

THE AGILE FULL ELECTRIC SCALE PALLET TRUCK



SCALE TRUCK GS/P

The GS/P pallet truck is an intelligent and robust tool to be used for weighing and transporting your loads at the same time, making stock and dispatch processes faster, simpler and more efficient. The machine can be equipped with supplements such as printer, USB or CE-M certification, and thanks to the 4 load cells it is able to be very precise and functional. Ideal for checking incoming goods, avoiding overloads and determining shipping weights.

AGILE EVO

The innovative motorized pallet truck that combines electric and manual function for convenient usability. Powerful, fast and Li-Ion powered, Agile EVO features electric motors for lift and drive.

Main advantages:

- 100% electric lift and drive, for increasing efficiency of procedures and saving time.
- Powerful battery 12.8Ah, ensuring great productivity.
- Manual switch, to be used in case of low battery to reach the charging station.



www.pramac.com

DISPLAY

Its large-sized 6 digits LCD display provides accurate and precise weighing in kg and lb. Its software allows not only net/gross/tare weighing but also unit counting, adding and totalling of multiple loads.
Weights are shown in 0,5 kg/lb steps with 0,05% precision. Main functions are:

- Tare
- Unbalanced load
- Auto-off
- Piece-counter
- Weight totalisation (horizontal and vertical)
- Bluetooth
- Diagnostics



FRAME STRUCTURE

The structure is designed with a double frame consisting of a lower fork on which stands a counter fork. Both forks house two load cells allowing a uniform load distribution, and keeping high weighing accuracy even in case of collision and unbalanced load.



BATTERY and BATTERY CHARGER

The GS/P is supplied complete with rechargeable battery and charger. The battery module provides 50 hours autonomy.



SUPPLEMENTS *(Only available at time of order)*

Printer
As supplement, the machine can be equipped with a built-in printer, able to print gross, tare and net weights (kg or lb), date, quantity of pieces on the scale.



USB
It may also be enriched with another supplement, the USB, allowing you to store weighing data in a text file, for archiving and processing via PC.



CE-M Approval
Essential for selling by weight in legal for trade applications. The approved weight is expressed with a division equal to 1kg.



www.pramac.com

LI-ION BATTERY

Long life 36V battery easy to remove for charging and continuous operation with the spare battery.

Two types of charger available (bench and wall mounted) with standard and fast charging time.



ADVANCED PERFORMANCES

Powerful and fast, Agile is a smart pallet truck that optimizes your productivity by being more efficient and faster.

- **DOUBLE TRACTION WHEELS** WITH **NON-MARKING RUBBER**: The first pallet truck with 2 traction wheels in the market, for high stability, better traction and durability.
- **1.2 TONS LOAD** CAPACITY: To cover all logistic needs.
- **AC MOTORS**: Maintenance-free motor grants reduced sound emission (Agile is among the most silent truck in the category), and is specific for intensive working cycles.
- **5.3 KM/H** MAX SPEED: Best in class in light semi-electric category.



EXCEPTIONAL EASE OF USE

The simplicity of Agile and the great maneuverability will immediately help improve your everyday work.

- COMPACT & LIGHT: Ideal for use in any application where space and weight is critical.
- POWERFUL & STABLE: Ideal for loading/unloading, slopes, uneven floors and everyday last mile deliveries.
- SIMPLE SWITCH ON/OFF: Equipped with the practical pocket size key switch, easily removable when the machine is not in use.



USER FRIENDLY FRONT LED INTUITIVE DISPLAY

Equipped with 3 push buttons to make easily settings and read truck activities info. Operator can get information on:


- Battery status of charge (% of charge);
- Timers (total and partial trip hour meter in h);
- Distance traveled (total and partial trip distance in km);
- Speed adjustment (% of max speed);
- Diagnostic page;
- Error page.



100% SAFETY

Agile is a reputable tool that cares about user safety. No worries anymore, it works hard for you giving superior results in total safety.


- EASY SPEED ADJUSTMENT: Safe driving performance according to operator's skill level or to workplace requirements.
- SAFETY IN NARROW SPACE: The turtle mode allows for controlled maneuvering in tight spaces.
- DOUBLE WHEELS SYSTEM: The large diameter of the wheels allows great stability and smoothness, preventing the pallet truck from overturning.

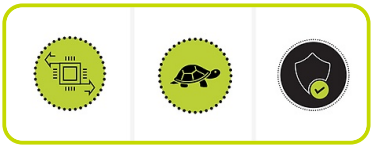

www.pramac.com

OPTIONS

- **Plus version:** extra power battery **17Ah** (including on-board charger)
- Additional spare **battery** for continuous use
- **Fast** battery charger

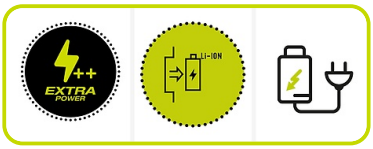

www.pramac.com

Description			
1.1 Manufacturer			LIFTER
1.3 Drive			Electric
Lift			Electric
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	1200
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	975
1.9 Wheel base	y	mm	1250

Weights			
2.1 Service weight		kg	137
2.2 Axle load, laden rear		kg	885
2.2 Axle load, laden front		kg	452
2.3 Axle load, unladen front		kg	92
2.3 Axle load, unladen rear		kg	45

Tyres/Chassis			
3.1 Tyres: front wheels			RUBBER
3.1 Tyres: rear wheels			POLY
3.2 Tyre size: Steering wheels - Width		mm	40
3.2 Tyre size: Steering wheels - Diameter		mm	200
3.3 Tyre size: Load rollers - Diameter		mm	82
3.3 Tyre size: Load rollers - Width		mm	60
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	4
3.5 Tyre size: front wheels - Q.ty (X=driven)		nr	2x
3.6 Tread, front	b10	mm	162
3.7 Tread, rear	b11	mm	375

Dimensions			
4.4 Lift height	h3	mm	115
4.9 Height of tiller in drive position max	h14	mm	1210
4.9 Height of tiller in drive position min	h14	mm	830
4.15 Height, lowered	h13	mm	90
4.19 Overall lenght	l1	mm	1665
4.20 Lenght to face of forks	l2	mm	480
4.21 Overall width (front/rear)	b1/b2	mm	555
4.22 Fork dimensions - Thickness	s	mm	60
4.22 Fork dimensions - Width	e	mm	180
4.22 Fork dimensions - Lenght	l	mm	1185
4.25 Forks width	b5	mm	555
4.32 Ground clearance, centre of wheelbase	m2	mm	30
4.34 Aisle width	Ast	mm	2109
4.35 Turning radius	Wa	mm	1450


www.pramac.com


Performance data			
5.1	Travel speed laden	km/h	4,2
5.1	Travel speed unladen	km/h	5,3
5.2	Lifting speed laden	m/s	0,018
5.2	Lifting speed unladen	m/s	0,021
5.3	Lowering speed laden	m/s	0,1
5.3	Lowering speed unladen	m/s	0,02
5.8	Max gradeability unladen	%	5/10
5.10	Service brake		Electric

Electric motors			
6.1	Drive motor power	kW	2x0,25
6.2	Lift motor power	kW	0,4
6.4	Battery voltage	V	36
6.5	Battery weight	kg	3

Scale			
	Digits	n.	6
	Digit height	mm	25
	Kilograms		Yes
	Lbs		Yes
	Tare		Yes
	Auto-off		Yes
	Totalization		Yes
	Counting		Yes
	Operating time	h	50
	Accuracy	%	0.05
	Load cells	n.	4
	Division	kg	0.5
6.4	Battery voltage	V	6
6.4	Battery capacity	Ah	4

www.pramac.com

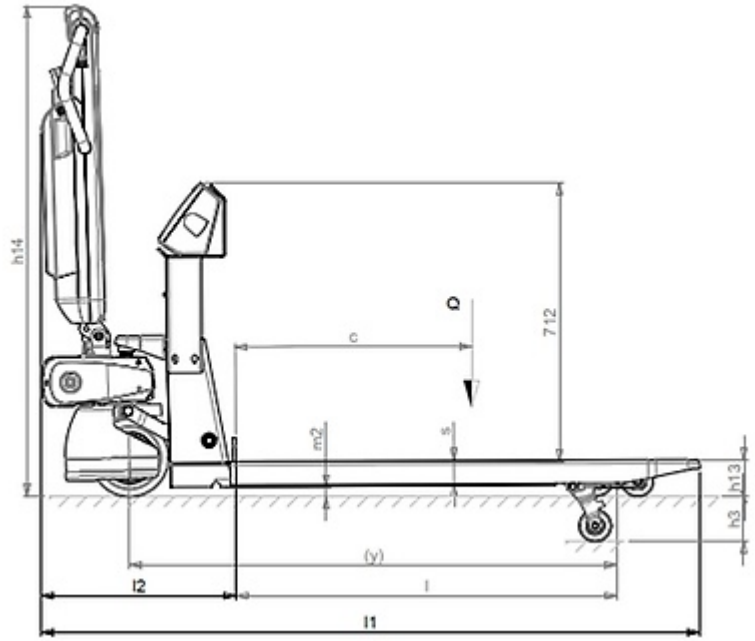

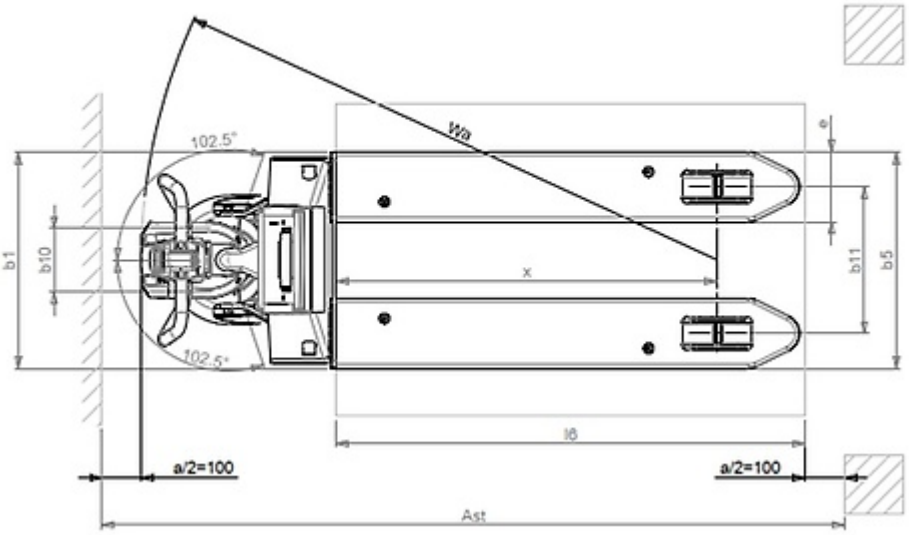

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 26/05/2025 (ID 17779)

©2025 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice