PY20 1150x540

SCALE PALLET TRUCK 2000 KG



The PY20 is the easy-to-use solution for the everyday weighing needs up to 2000 kg. Thanks to the 4 load cells, this scale pallet truck is able to guarantee accurate weighing results.

DISPLAY

Its 6 digits LED display provides accurate and precise weighing in kg and lb, and automatic energy-saving shutdown. Weights are shown in 0.5 kg steps with 0.1% precision. Main functions are:

- Tare
- Hold
- Weight totalization
- Zero
- Unit switchable



BATTERY AND BATTERY CHARGER

The PY20 is supplied complete with rechargeable 6V/4Ah battery and charger. The battery module provides 40 hours autonomy.



CONFIGURATION PY20

STANDARD: polyurethane steering wheels and poly tandem rollers



www.pramac.com

Description			
1.1 Manufacturer			LIFTER
1.3 Drive			Manual
Lift			MANUAL
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	2000
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	938
1.9 Wheel base	y	mm	1260

Weights			
2.1 Service weight		kg	99
2.2 Axle load, laden rear		kg	629
2.2 Axle load, laden front		kg	1470
2.3 Axle load, unladen front		kg	62
2.3 Axle load, unladen rear		kg	37


Tyres/Chassis			
3.1 Tyres: front wheels			POLY
3.1 Tyres: rear wheels			POLY
3.2 Tyre size: Steering wheels - Width		mm	50
3.2 Tyre size: Steering wheels - Diameter		mm	180
3.3 Tyre size: Load rollers - Diameter		mm	70
3.3 Tyre size: Load rollers - Width		mm	70
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	4
3.5 Tyre size: front wheels - Q.ty (X=driven)		nr	2
3.6 Tread, front	b10	mm	108
3.7 Tread, rear	b11	mm	380


Dimensions			
4.4 Lift height	h3	mm	120
4.9 Height of tiller in drive position max	h14	mm	1200
4.9 Height of tiller in drive position min	h14	mm	290
4.15 Height, lowered	h13	mm	80
4.19 Overall lenght	l1	mm	1640
4.20 Lenght to face of forks	l2	mm	410
4.21 Overall width (front/rear)	b1/b2	mm	540
4.22 Fork dimensions - Thickness	s	mm	50
4.22 Fork dimensions - Width	e	mm	160
4.22 Fork dimensions - Lenght	l	mm	1150
4.25 Forks width	b5	mm	540
4.32 Ground clearance, centre of wheelbase	m2	mm	35
4.34 Aisle width	Ast	mm	1678
4.35 Turning radius	Wa	mm	1350

Performance data		
5.2 Lifting speed laden	strokes	12
5.2 Lifting speed unladen	strokes	12

www.pramac.com

Scale			
	Digits	n.	6
	Digit height	mm	3
	Kilograms		Yes
	Lbs		Yes
	Tare		Yes
	Unbalanced load		Yes
	Auto-off		Yes
	Totalization		Yes
	Accuracy	%	0.1
	Load cells	n.	4
	Division	kg	0.5
6.4	Battery voltage	V	6
6.4	Battery capacity	Ah	4

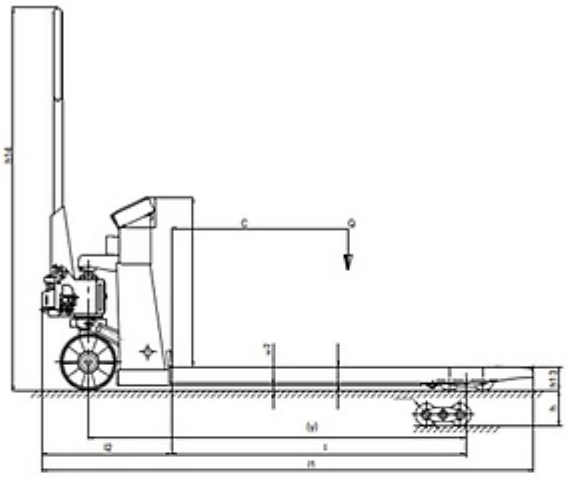

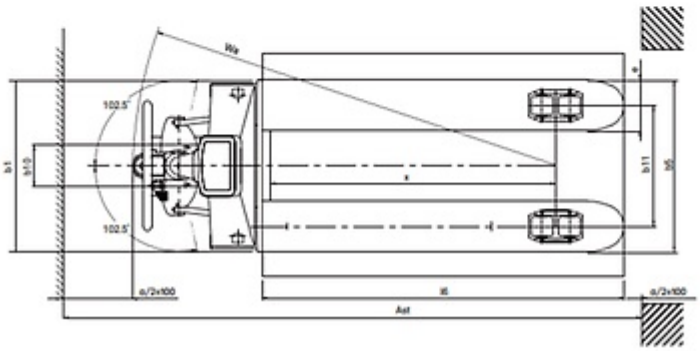

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 23/06/2025 (ID 20991)

©2025 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice