
TX 10/16

THE RAISING POWER



TX

The TX series stackers are characterized by manual traction and electrohydraulic lifting technology. These stackers are very steady and are suitable for lifting very heavy loads safely. Version 12 (1.2 t) includes polyurethane wheels as standard to reduce resistance and effort required even with full load capacity.

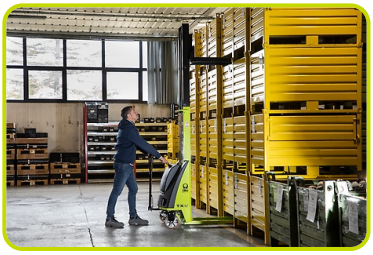

START KEY AND BATTERY CUT-OFF (ISOLATOR) SWITCH

The start key on the TX stacker performs a double function:
• switches the stacker on/off;
• is an emergency control, i.e. it completely stops battery power supply and thus prevents the lifting of forks.



FOOT BRAKE

The foot brake performs the parking brake function.



www.pramac.com

TILLER

The ergonomic tiller allows an excellent directionality of the machine, thanks to a steering system on both rear wheels.



PROTECTIVE COVER

It allows an easier access to the battery housing for faster ordinary maintenance.



GEL (OPTIONAL)

GEL batteries available on demand.



www.pramac.com

Description			
1.1 Manufacturer			LIFTER
1.3 Drive			Manual
1.4 Operator type			Pedestrian
1.5 Load capacity	Q	kg	1000
1.6 Load centre distance	c	mm	600
1.8 Load axle to end forks	x	mm	630
1.9 Wheel base	y	mm	965

Weights			
2.1 Service weight (battery included)		kg	311
2.2 Axle load, laden rear		kg	1070
2.2 Axle load, laden front		kg	241
2.3 Axle load, unladen front		kg	210
2.3 Axle load, unladen rear		kg	101

Tyres/Chassis			
3.1 Tyres: stabilizers wheels - front			RUBBER
3.1 Tyres: rear wheels			NYLON
3.3 Tyre size: Load rollers - Diameter		mm	82
3.3 Tyre size: Load rollers - Width		mm	70
3.4 Tyre size: stabilizers wheels front - Diameter		mm	200
3.4 Tyre size: stabilizers wheels front - Width		mm	50
3.5 Tyre size: rear wheels - Q.ty (X=driven)		nr	2
3.6 Tread, front	b10	mm	620
3.7 Tread, rear	b11	mm	410

Dimensions			
4.2 Height, mast lowered	h1	mm	1970
4.3 Normal free lifting	h2	mm	1510
4.4 Lift height	h3	mm	1510
4.5 Height, mast extended	h4	mm	1970
4.9 Height of tiller in drive position max	h14	mm	1080
4.15 Height, lowered	h13	mm	90
4.19 Overall lenght	l1	mm	1750
4.20 Lenght to face of forks	l2	mm	600
4.21 Overall width (front/rear)	b1/b2	mm	750
4.22 Fork dimensions - Thickness	s	mm	70
4.22 Fork dimensions - Width	e	mm	150
4.22 Fork dimensions - Lenght	l	mm	1150
4.24 Fork carriage width	b3	mm	650
4.25 Forks width	b5	mm	560
4.32 Ground clearance, centre of wheelbase	m2	mm	20
4.34 Aisle width	Ast	mm	2336
4.35 Turning radius	Wa	mm	1440


Performance data			
5.2 Lifting speed laden		m/s	0.09
5.2 Lifting speed unladen		m/s	0.12
5.3 Lowering speed laden		m/s	0.4
5.3 Lowering speed unladen		m/s	0.1


www.pramac.com

Electric motors			
6.2	Lift motor power	kW	1.6
6.4	Battery voltage	V	12
6.4	Battery capacity	Ah	70
6.5	Battery weight, Min	kg	18
6.5	Battery weight, Max	kg	18
8.4	Sound level at driver's ear	dB(A)	67

Residual lifting capacity		
Lifting height (H3) 1600 mm	kg	1000

Battery and battery charger integrated

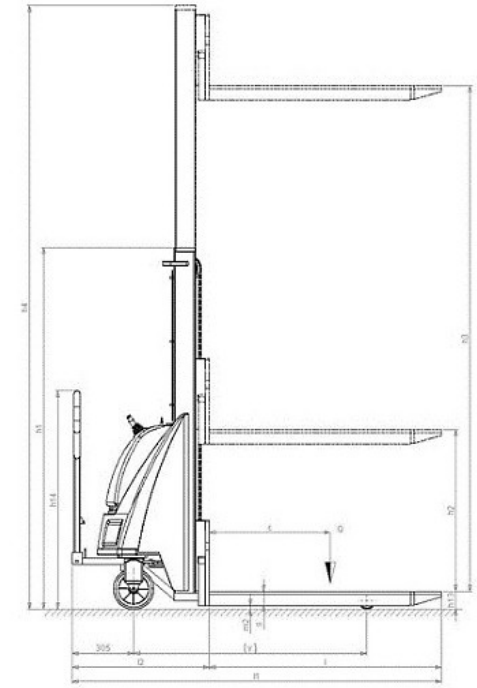

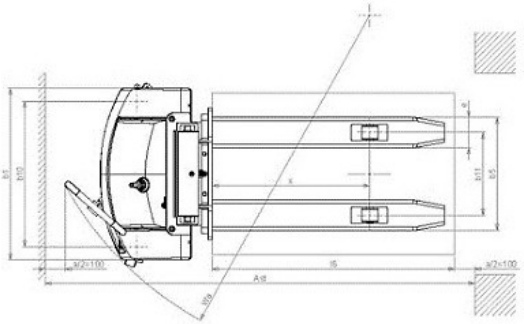

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 30/06/2025 (ID 636)

©2025 | PR Industrial S.r.l. – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice