TG16/3 IP44


PTO SHAFT GENERATORS



The TG class generator can produce high quality power for any agricultural use.

Power		
Three phase power COP	kVA	14.4
Single phase power COP	kVA	7.2

Specifications		
Voltage	V	400/230
Frequency	Hz	50
Power factor	cos ϕ	0.8/1
Gear box revolution	rpm	3000
Power (tractor)	kW/HP	29/40
Revolution PTO shaft	rpm	435
Voltage regulation system		Compound
Voltage Accuracy	%	5

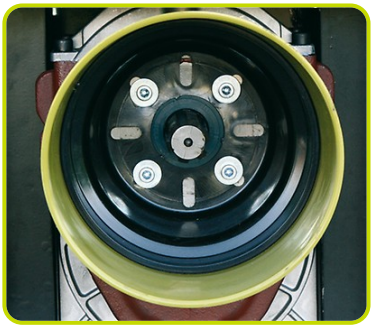

www.pramac.com

Dimensional data		
Length	(L) mm	746
Width	(W) mm	580
Height	(H) mm	958
Dry weight	kg	131

Equipments	
Thermomagnetic protection	x
Differential protection	x
Voltmeter	x
Frequency meter	x
Min - max Voltage controller	x



Sockets	
SCHUKO 230V 16A IP54	1
2P+T CEE 230V 32A IP44	1
3P+N+T CEE 400V 32A IP44	1

Alternator & Socket protection	
Electric protection	IP44
Panel protection	IP54

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 19/05/2025 (ID 2324)

©2025 | PR Industrial S.r.L unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice