TG48/15 IP44


PTO SHAFT GENERATORS



The TG class generator can produce high quality power for any agricultural use.

Power		
Three phase power COP	kVA	43.2
Single phase power COP	kVA	15.1

Specifications		
Voltage	V	400/230
Frequency	Hz	50
Power factor	cos ϕ	0.8/1
Gear box revolution	rpm	1500
Power (tractor)	kW/HP	88/120
Revolution PTO shaft	rpm	395
Voltage regulation system		Electronic AVR
Voltage Accuracy	%	0.5

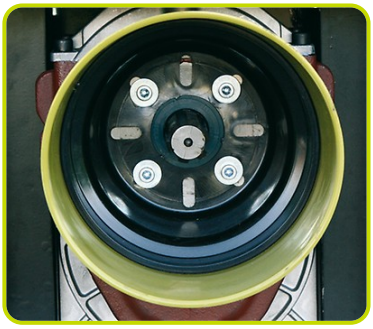

www.pramac.com

Dimensional data		
Length	(L) mm	1110
Width	(W) mm	720
Height	(H) mm	1322
Dry weight	kg	390

Equipments	
Thermomagnetic protection	X
Differential protection	X
Voltmeter	X
Frequency meter	X
Min - max Voltage controller	X



Sockets	
SCHUKO 230V 16A IP54	1
3P+N+T CEE 400V 32A IP44	1
3P+N+T CEE 400V 63A	1

Alternator & Socket protection	
Electric protection	IP44
Panel protection	IP54

www.pramac.com

The information is aligned with the Data file at the time of download.
Printed on 19/05/2025 (ID 2337)

©2025 | PR Industrial S.r.L unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc.| All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice